


# Series 4000

## Rated 10 Amps resistive Pushbutton Switch Illuminated



**ELECTRO-MECH**  
COMPONENTS

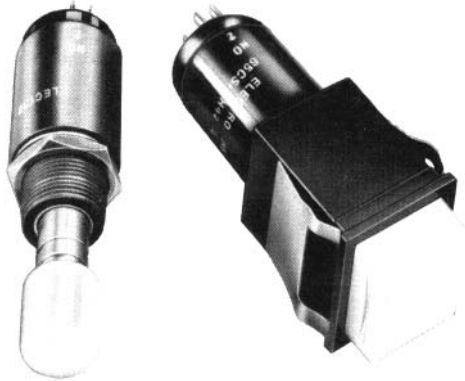


- \* Low profile, matches EMC Series 2600 sizes
- \* Momentary or alternate action switching
- \* Front panel mount or sub panel mount

Applications requiring front-panel power switch to 10A will find this popular sized, compact unit to meet every requirement. Designed for UL applications, the Series 4000 is available in standard metal housing for sub-panel mounting, front panel mounting with bezel adapter, or all-plastic unitized housing.

Snap-action performance is reliable, and circuitry and terminals are ruggedly designed for full current capacity. Popular, low-profile design matches other low-current EMC product Series. Special options on other EMC Series' also available on the Series 4000.

Series 4000 (not to scale):

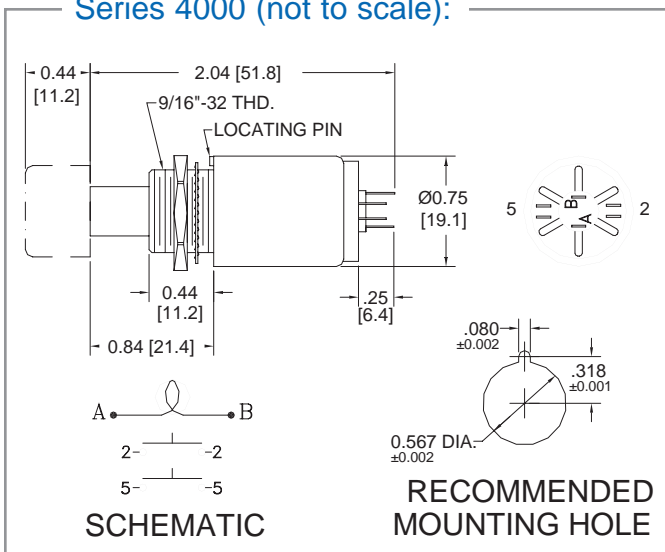

### Specifications:

Ratings:	30 volts DC or 125 volts AC; 10.0A resistive, 5.0A inductive
Weight:	0.8 oz. (22g) (approx.)
Operating Pressure:	2 lbs. ± 1 lb. (454g ± 227g)
Plunger Travel:	0.187 approx. (25.4mm)
Actuations:	100,000 minimum
Circuitry:	2PST, 2 N.O. only + lamp circuit
Contacts:	Silver plated (gold plating optional)
Terminals:	Standard EMC solder lug. Accepts two 20 AWG wires. PC pin terminals also available.
Lens:	Accommodates any EMC lens for sub panel mount; only 3/4" square lens for 6x- bezel mount, p/n L63 or L53; any EMC color.
Lamp or LED:	Accommodates one T 1-3/4 (5mm) midget flange base lamp or LED. Lamp circuit is independent.

For 6x-4x30 dimensions (switches with bezels), refer to "Mounting Adapters" specifications.

### Snap-In or Hard-Mount Installation:

Above items may be specified for Clip Springs (standard) or Hard Mount ("HM") backup channel with screws. Ordering example: 65HM-4130.

**All Plastic Unitized Housing** is available on 65-, 67-, and 68- models only. Add "PH" to suffix when specifying. Ordering example: 65HM-PH4230. Clip springs provided unless HM specified. Plastic mounting adapters provided with metal switch housing for 72- and 73- models (see Mounting Adapters).

### Part Number Table:

Lens Size (Inches)	Switch Function		
	Momentary	Push-On/ Push-Off	PO/Rem-In/ Push-Off
No Adapter (Any Lens)	4130	4230	4330
3/4" Square Lens	6x-4130	6x-4230	6x-4330
3/4" Round Lens	72-4130	72-4230	72-4330
3/4" x 1-1/2" Rect. Lens	73-4130	73-4230	73-4330

4000 10/2003

**electro-mech**



www.electromechcomp.com

info@electromechcomp.com

1826 Floradale Avenue • South El Monte, CA 91733-3689 USA \* (626) 442-7180 \* (888) 442-7180 \* Fax (626) 350-8070