
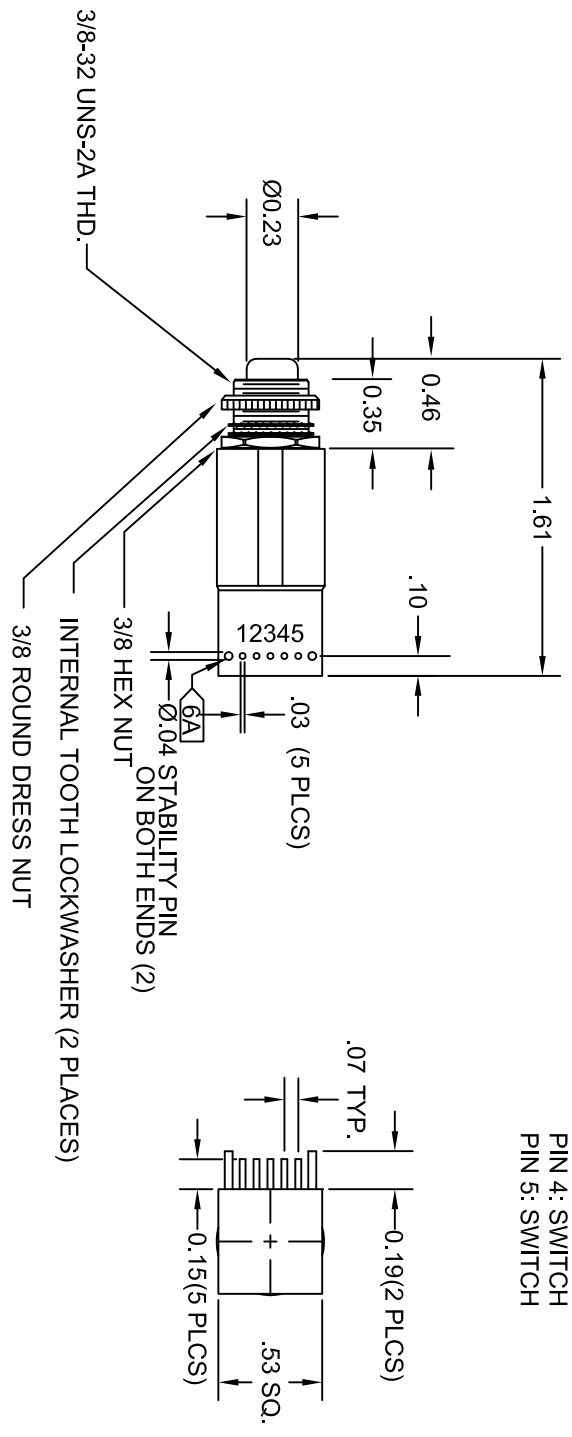



PIN 1: GREEN
 PIN 2: CATHODE (NEG)
 PIN 3: BLUE
 PIN 4: SWITCH
 PIN 5: SWITCH





NOTES

1. RATINGS: 30VDC OR 115VAC, 2 AMPS RESISTIVE, 0.5 AMP INDUCTIVE.
2. OPERATING PRESSURE: 8 OZ. ± 4 OZ.
3. PLUNGER TRAVEL: 0.100 APPROX.
4. ACTUATIONS: 100,000 MINIMUM.
5. CONTACTS: SILVER PLATED.
6. TERMINALS: SPECIAL PINS AS SHOWN. MILL-MAX P/N 3110-2-00-15-00-00-08-0. (5 PIECES).
7. STABILITY PINS: 2 STABILITY PINS AS SHOWN. MILL-MAX P/N 3102-2-00-15-00-00-08-0. (2 PIECES).
8. SWITCH TYPE: SPECIAL LED SWITCH; SIMILAR TO SW43745 SWITCH ASSEMBLY.
9. SWITCH ACTION: MOMENTARY (NO SNAP FEEL).
10. SWITCH CIRCUITRY: SPST, 1 N.O. CIRCUIT.
11. LENS: SPECIAL CLEAR LENS, 0.23 DIA.
12. LENS: BLUE/GREEN BI-COLOR LED, BUILT-IN, LC LED P/N N500TBG4D.
13. LENS LEGEND: NONE.
14. MOUNTING: MOUNTS IN MOUNTING HOLE AS SHOWN.
15. WEIGHT: 4 GRAMS (APPROX.)

SWITCH SCHEMATIC



L.E.D. SCHEMATIC



RECOMMENDED
 PANEL CUT-OUT

C		ELECTRO-MECH COMPONENTS INC.				PUSHBUTTON SWITCH	
		SOUTH EL MONTE, CA * 626/442-7180 * FAX 626/350-8070					
B							
A		REVISE DIMENSIONS ON PINS (0.19 AND 0.15 WERE BOTH 0.13)		01AUG07 TT		FSCM: 07150	
LT		REVISIONS		DATE		DIM. IN INCHES	
						TOL. .XX±0.020 .XXX±0.010	
						SCALE FULL	
						DRAWN TT	
						FILE SW44475	
						CHKD 05JUN06	
						APVD	
						SW44475	