




# Compact pushbutton switch SW43728

## Features

- ◆ compact momentary switch
- ◆ up to 2PDT switch circuitry
- ◆ <1.8" behind panel depth
- ◆ custom lens symbol
- ◆ 3/4" diameter lens
- ◆ <1 ounce total weight

## Electro-Mech Announces Its Lightweight Compact Switch


Electro-Mech Components, Inc. introduces the new SW43728 illuminated momentary pushbutton switch. Featuring a minimal weight of just under one ounce and a reduced overall length of 1.77", the new switch is ideally suited for medical applications such as external defibrillator control panels where weight and size are important requirements. Flush mount design provides safety by preventing accidental actuation.

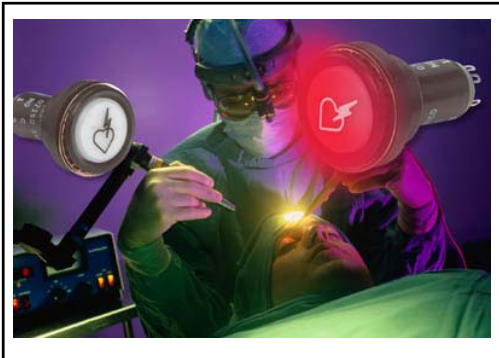

## Specifications (drawing SW43728 REV B):

- Weight: 1.0 ounce maximum
- Operating Pressure:  $32 \pm 16$  ounces
- Switch Travel: 0.100 nominal
- Actuations: 100,000 minimum
- Switch Action: momentary
- Ratings: 30vdc or 115vac, 2a resistive, 0.5a inductive
- Contacts: silver plated
- Terminals: standard EMC solder lug
- Lamp: D330, 14vdc, 80mA, 0.50 mscp, one piece included

## Specifications (drawing SW43728 REV B) (not to scale):

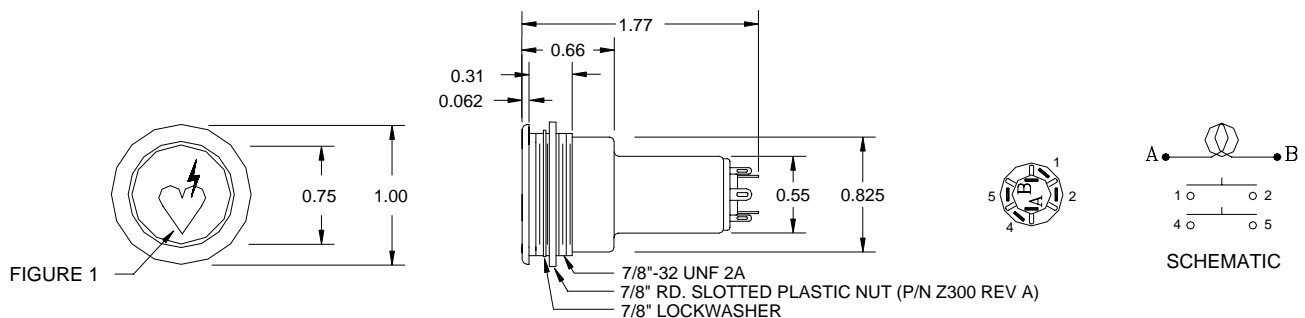

Electro-Mech Components, Inc. ♦ 888/442-7180 ♦ 626/442-7180 ♦ Fax 626/350-8070  
1826 Floradale Avenue ♦ South El Monte, CA 91733-3689 USA ♦ Email [Info@electromechcomp.com](mailto:Info@electromechcomp.com)  
web: [www.electromechcomp.com](http://www.electromechcomp.com)